



Purchasing Department

School of Medicine in Shreveport
School of Allied Health Professions
School of Graduate Studies

03/18/2010

Solicitation: 005442
"Rooftop Air Handling Units"

Addendum I

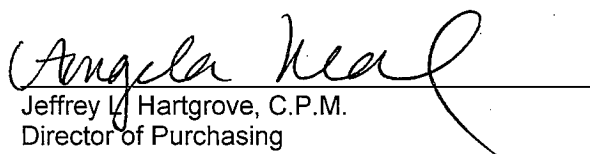
Due: 03/30/2010
Buyer: Randy Parker

The purpose of this addendum is to address and answer the following:

- A. Extends bid opening date until, **March 30, 2010 @ 2:00 pm**
- B. Altered specifications as attached

This addendum herein becomes a permanent part of Solicitation #005245 and should be submitted with your bid. All other conditions and specifications remain the same.

Sincerely,


Jeffrey L. Hartgrove, C.P.M.
Director of Purchasing
and Materials Management

Addendum II # 005442

Addendum Acknowledgement:

BY: _____

Title: _____

Date: _____

**Addendum #1 for
Installation of New Package Rooftop Air Handling Units**

Project #1905

March 18, 2010

The specifications for the installation of new package rooftop air handling units dated February 11, 2010 are amended as follows:

1. Rooftop AHU Schedule

Mark	Manufacturer	Model #	Description
Unit 1	Carrier	48TCDA06A2A3-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 5 Tons Cooling 208/230-1-60 <ul style="list-style-type: none"> • Low Heat • Single Stage Compressor Models • Medium Static Option • Electro-mechanical controls
Unit 1	Carrier	CPLOWAMB001A00	Motormaster II Low Ambient Control
Unit 1	Carrier	CRTWOPOS010A00	Air Damper
Unit 1	Carrier	CRLVHLGD012A00	Louvered Condenser Coil Hail Guard
Unit 1	Carrier	CRRFCURB001A01	14-inch Tall Roof Curb
Unit 1	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Unit 1	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit
Unit 2	Carrier	48TCDD08A2A5-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 7.5 Tons Cooling 208/230-3-60 <ul style="list-style-type: none"> • Low Heat • Single Stage Compressor Models • Medium Static Option • Electro-mechanical controls
Unit 2	Carrier	CRTWOPOS011A00	Air Damper
Unit 2	Carrier	CPLOWAMB001A00	Motormaster II Low Ambient Control
Unit 2	Carrier	CRRFCURB003A01	14-inch Tall Roof Curb
Unit 2	Carrier	CRLVHLGD020A00	Louvered Condenser Coil Hail Guard
Unit 2	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Unit 2	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit

Unit 3	Carrier	48ES-A240403-TP	48ES/48ESN Packaged Gas Furnace/Air Conditioner System 2 Tons Cooling 208/230-1-60
Unit 3	Carrier	CPLOUVER007A00	Louvered Metal Outdoor Coil Grilles
Unit 3	Carrier	CPLOWAMB001A00	Motormaster II Low Ambient Control
Unit 3	Carrier	TB-PAC01	Base Programmable Air Conditioner Control
Unit 3	Carrier	CPRFCURB011A00	14 inch Common Flat Roof Curb
Unit 3	Carrier	CPFILTRK007A00	Internal Filter Rack
Unit 3	Carrier	CPMANDPR007A00	Manual Outside Air Damper
Unit 3	Carrier	CPHSTART002A00	Compressor Hard Start Kit
Unit 3	Carrier	CPCRKHTR008A00	240V Crankcase Heater
Unit 3	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit
Unit 4	Carrier	48TCDD20A2G5-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 18 Tons Cooling 208/230-3-60 <ul style="list-style-type: none"> • Low Heat • Medium Static Option - Vertical Models • Electro-mechanical controls
Unit 4	Carrier	CRTWOPOS012A00	Outdoor Air Damper
Unit 4	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit
Unit 4	Carrier	CRLOWAMB027A00	Motormaster I Low Ambient Control
Unit 4	Carrier	CRRFCURB045A00	14-inch Tall Roof Curb
Unit 4	Carrier	CRLVHLGD017A00	Louvered Condenser Coil Hail Guard
Unit 4	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Unit 5	Carrier	48TCDD17A2G5-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 15 Tons Cooling 208/230-3-60 <ul style="list-style-type: none"> • Low Heat • Medium Static Option - Vertical Models • Electro-mechanical controls
Unit 5	Carrier	CRTWOPOS012A00	Outdoor Air Damper
Unit 5	Carrier	CRLOWAMB027A00	Motormaster I Low Ambient Control
Unit 5	Carrier	CRRFCURB045A00	14-inch Tall Roof Curb
Unit 5	Carrier	CRLVHLGD017A00	Louvered Condenser Coil Hail Guard
Unit 5	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Unit 5	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit

Unit 6	Carrier	48TCDD08A2A5-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 7.5 Tons Cooling 208/230-3-60 <ul style="list-style-type: none"> • Low Heat • Two Stage Compressor Models • Medium Static Option • Electro-mechanical controls
Unit 6	Carrier	CRTWOPOS011A00	Air Damper
Unit 6	Carrier	CRSDTEST001A00	Smoke detector remote test/Reset/Alarm indicator kit
Unit 6	Carrier	CRRFCURB003A01	14-inch Tall Roof Curb
Unit 6	Carrier	CPLOWAMB001A00	Motormaster II Low Ambient Control
Unit 6	Carrier	CRLVHLGD020A00	Louvered Condenser Coil Hail Guard
Unit 6	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Unit 7	Carrier	48TCDA04A2A3-0A0A0	High Eff Low Gas Heat Single Pkg Rooftop 3 Tons Cooling 208/230-1-60 <ul style="list-style-type: none"> • Low Heat • Single Stage Compressor Models • Medium Static Option • Electro-mechanical controls
Unit 7	Carrier	CRTWOPOS010A00	Air Damper
Unit 7	Carrier	CPLOWAMB001A00	Motormaster II Low Ambient Control
Unit 7	Carrier	CRRFCURB001A01	14-inch Tall Roof Curb
Unit 7	Carrier	CRLVHLGD011A00	Louvered Condenser Coil Hail Guard
Unit 7	Carrier	33CS220-FS	Debonair 7-Day Programmable Thermostat
Units 1-7	Carrier	SS-D1420	Smoke detectors for return & supply (Total of 14 needed)
Units 1-7	Carrier	SS-DST1.5	Smoke detector tube 1.5 ft. (Total of 14 needed)

2. Add the following line under 2.2 MECHANICAL specifications:

2.2.4 Existing return and supply ductwork shall be modified to adapt to the new package rooftop AHU configurations using transitions that reduce airflow restriction as much as possible.

-End of Addendum #1-